

Chain Screen



Keep insects out. Let fresh air in.

A simple and hard-wearing doorway screen designed for commercial, industrial and high-traffic environments. Made using anodised aluminium chain links suspended from a removable top rail, the screen allows airflow and visibility while helping to reduce the entry of flying insects.

Suitable for fitting inside or outside the doorway and available as either a made-to-measure screen or DIY kit.

Why Choose This Screen?

Chain screens provide a practical walk-through solution for busy entrances where doors are regularly left open. The weighted aluminium chains separate easily for access before falling back into place, making them ideal for workshops, kitchens, warehouses and service areas.

Their durable anodised finish is designed to cope with demanding environments and regular daily use, while remaining easy to clean and maintain.

Screen Options


Made-to-Measure - Supplied ready-made to your specified sizes for straightforward installation.

DIY Kit - Able to make a screen 1m x 2.4m and consists of:

- 1x Hanging Rail (1m width)
- 3x Brackets
- 2x 100m bags of chain

Product Details

- Anodised aluminium chain links
- Removable aluminium top rail
- Silver finish as standard
- Other colours available on request
- Suitable for face fixing
- Can be fitted internally or externally

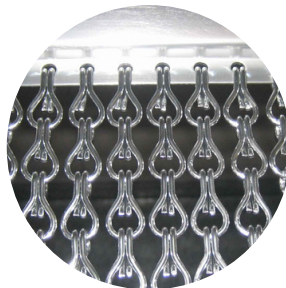

Before You Order

Please ensure you have enough flat surface above and around your doorway for the rail and fixing brackets to sit securely. Check that there is enough clearance for any handles, fittings, thresholds or obstructions, and measure carefully, as all made-to-measure screens are manufactured to the sizes supplied.

Turn over for the step-by-step measuring guide.

The Flyscreen Company Ltd, Unit 4, Warren Business Park, Knockdown, Tetbury, Gloucestershire, GL8 8QY

sales@flyscreen.com | 01454 238288 | www.flyscreen.com

Company Register: 3615661 | VAT: 741888897

Fly Screen Systems | Insect Mesh | Soffit & Ventilation Mesh | Chain Screens | Electric Fly Killers | Pest Control Options

September 2026

Chain Screen



Measuring Instructions

Step 1: Measure the Width

Measure the aperture width and allow a minimum overlap of 10mm on each side.

Step 2: Measure the Height

Measure from the doorsill to the top of the aperture. Add 30mm to allow room for the fixing brackets, then deduct 10mm for floor clearance.

Step 3: Final Order Size


- Width = Aperture + 20mm minimum
- Height = Aperture + 30mm - 10mm



Stainless Steel Rail



Stainless Steel
Fixing Brackets

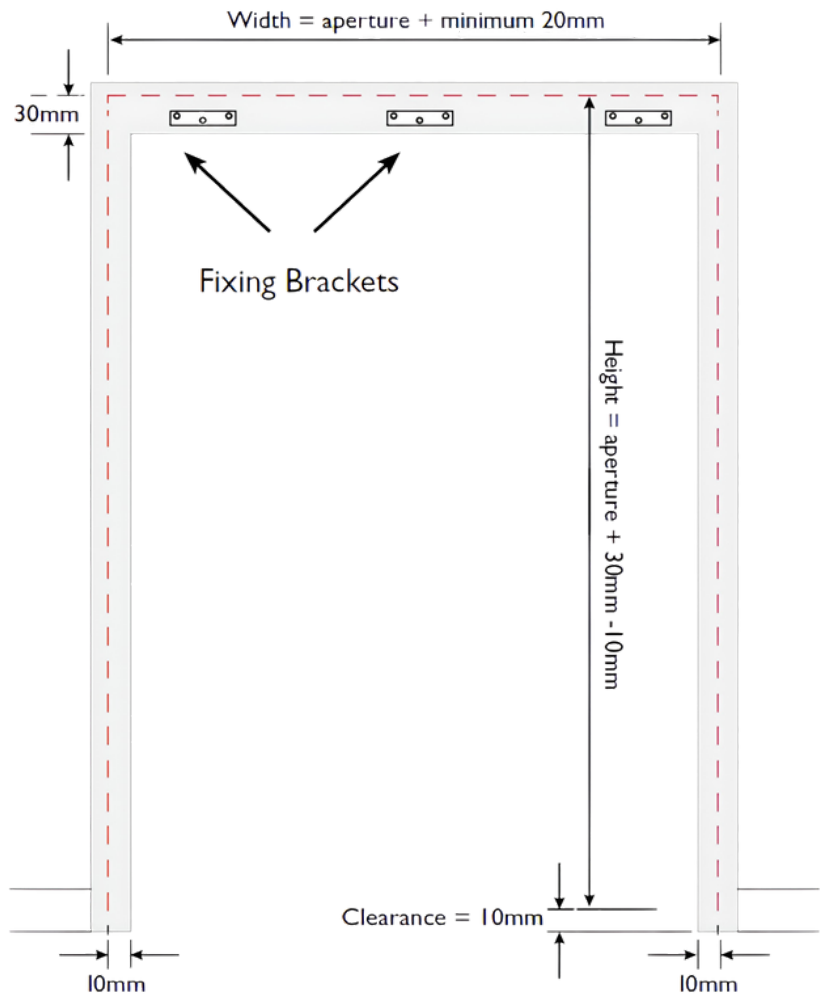

Important Notes

- Always measure in millimetres (mm) and provide sizes as width × height
- Include any bevelled edges in your measurements
- All screens are made to your measurements (±2mm tolerance applies), so it's important to measure carefully.
- No allowances or deductions are made by us
- Double check your measurements before ordering