

Hinged Door Screen

Commercial



Keep insects out. Let fresh air in.

A robust hinged door screen designed for commercial and high-traffic environments. Suitable for face fitting onto an existing door frame or surrounding wall surface, helping prevent flying insects entering the building while still allowing natural airflow and ventilation.

Why Choose This Screen?

Designed for frequent everyday use, this hinged door screen features a strong white powder-coated aluminium frame, grey PVC-coated fibreglass insect mesh, spring closer and foot plate as standard.

A single midbar is included as standard, while an optional central push plate provides additional strength for higher traffic areas. Heavy-duty PVC-coated mesh is also available on request.

Product Details

- White powder-coated aluminium frame
- Grey PVC-coated fibreglass insect mesh as standard
- Face fit only
- Spring closer and two handles included
- Foot plate supplied as standard
- Either standard midbar or central push plate available
- Heavy-duty mesh available on request
- Suitable for internal or external fitting
- Maximum size up to 1000mm wide x 2350mm high
- Available as a DIY Kit or Made to Measure



Before You Order

- Please ensure there is sufficient flat surface around the opening for the frame, hinges and magnetic catch.
- If your door handle projects more than 10mm beyond the mounting surface, a sub-frame may be required to allow the screen to close correctly.

Turn over for the step-by-step measuring guide.

The Flyscreen Company Ltd, Unit 4, Warren Business Park, Knockdown, Tetbury, Gloucestershire, GL8 8QY

sales@flyscreen.com | 01454 238288 | www.flyscreen.com

Company Register: 3615661 | VAT: 741888897

Fly Screen Systems | Insect Mesh | Soffit & Ventilation Mesh | Chain Screens | Electric Fly Killers | Pest Control Options

September 2026

Hinged Door Screen

Commercial




Measuring Instructions

Measure the width and height of the aperture in three places (including any bevelled edges) and use the smallest measurement for each. If space allows, you may increase the overlap to improve coverage around the opening.


Width = aperture width + 20mm

Height = aperture height + 10mm

*If space permits, you may add 42mm to each side to allow the screen to fully overlap the opening. Ensure sufficient space remains for the hinges and magnetic catch.

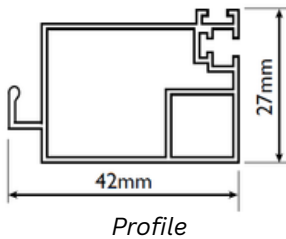

Profile

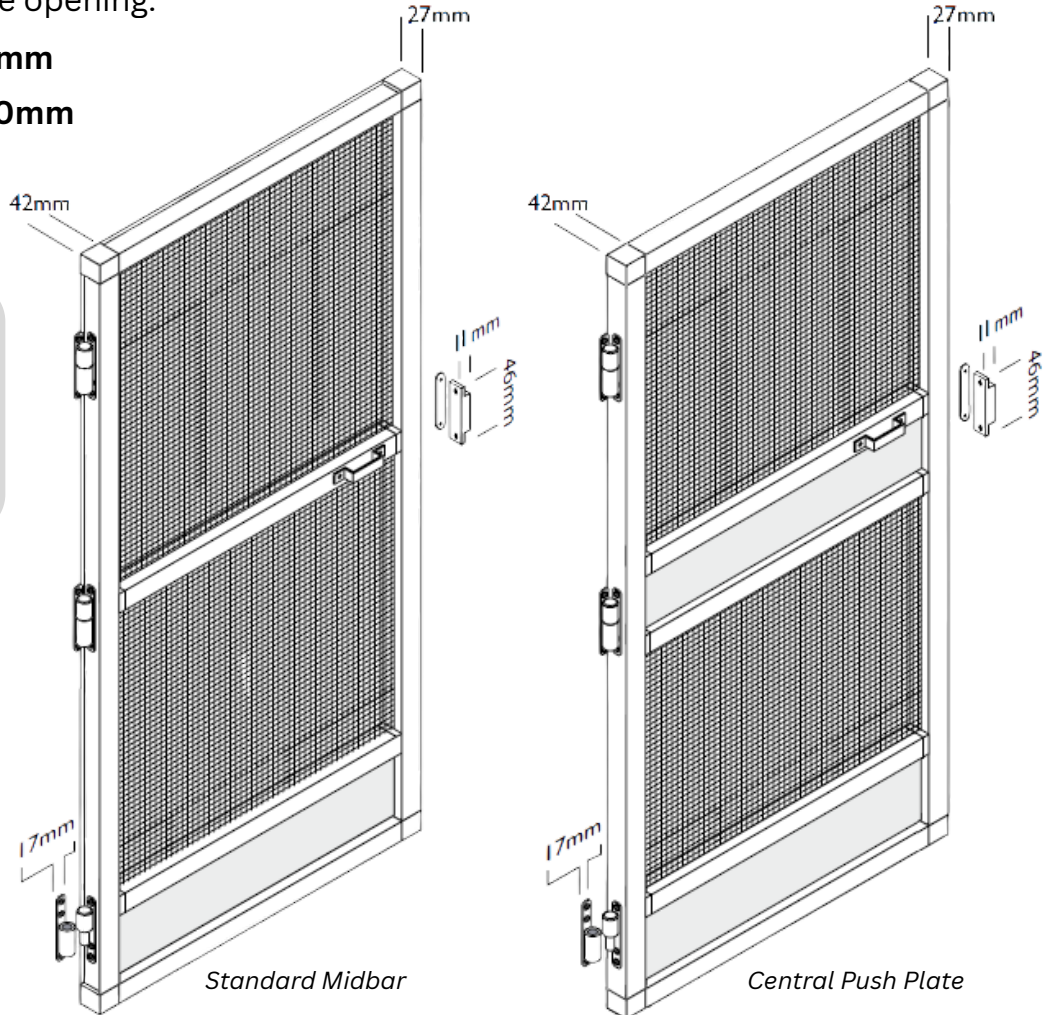

Additional Clearance:

- Hinge clearance: minimum 17mm
- Magnetic catch clearance: minimum 11mm
- Do not include these allowances in the sizes provided
- Door handles projecting more than 10mm require a sub-frame

Important Notes

- Always measure in millimetres (mm) and provide sizes as width × height
- Include any bevelled edges in your measurements
- It is not supplied with a sub-frame.
- All screens are made to your measurements (±2mm tolerance applies), so it's important to measure carefully.
- No allowances or deductions are made by us
- Double check your measurements before ordering

The Flyscreen Company Ltd, Unit 4, Warren Business Park, Knockdown, Tetbury, Gloucestershire, GL8 8QY

sales@flyscreen.com | 01454 238288 | www.flyscreen.com

Company Register: 3615661 | VAT: 741888897

Fly Screen Systems | Insect Mesh | Soffit & Ventilation Mesh | Chain Screens | Electric Fly Killers | Pest Control Options

September 2026